

On field assessment of UHF technology for sheep electronic identification

<u>Duroy, S.</u>, Gautier, D., Grisot, P.G., Demarquet, F., Hardy, A., Przewozny, J.L.











70th EAAP Annual meeting – Session 3

PLF Possibilities for sheep, goats, poultry and horses

Ghent - August 26, 2019

Context





- Low-Frequency (LF) RFID is mandatory in EU for small ruminants identification since 2010
- Only 38 % of European sheep farmers use electronic identification (2018, *SheepNet network*)
- Still not easy to collect identification numbers of moving animals and to get a complete traceability...

Context



Reading batches of moving animals with LF tags:

- One-by-one reading
 - → Make animals move on through individual corridors
- Animals flow slows down
- People need to push animals
 - → Waste of time



Can UHF be a solution?





LF vs UHF



Main specifications





Low-Frequency (BF)

NO

Up to 80 cm

NO

Ultra-High Frequency (UHF)

YES

Several meters

YES

Multiple readings

Water effect

Read range

Get a user experience



- Make reading tests in real conditions
- Use readers and antennas not made for livestock use

Step 1
Experimental farms



Step 2 Trader's collection centers



UHF Eartag









Reader



Antennas

Reader



App







Bluetooth Module



Reader (19 x 17,5 x 3 cm)



Trial conditions in farms

• Width of corridor : 2 m to 2,5 m

Nb of antennas : 4

Height of antennas : 1,2 m

• Batch sizes : 50 to 130 Animals

• Speed : walk, run

Fences : wood / metal





Trial conditions















Read rate - Results

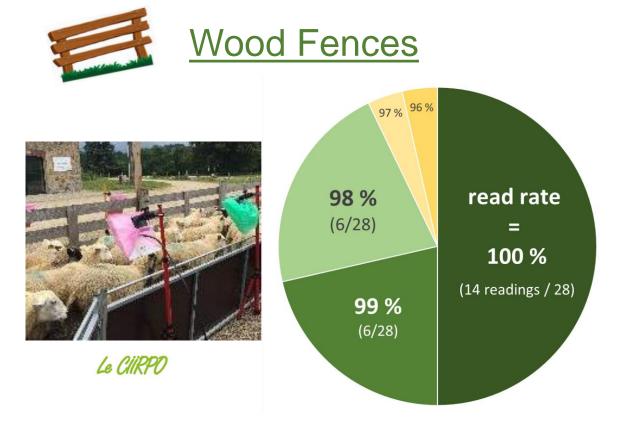

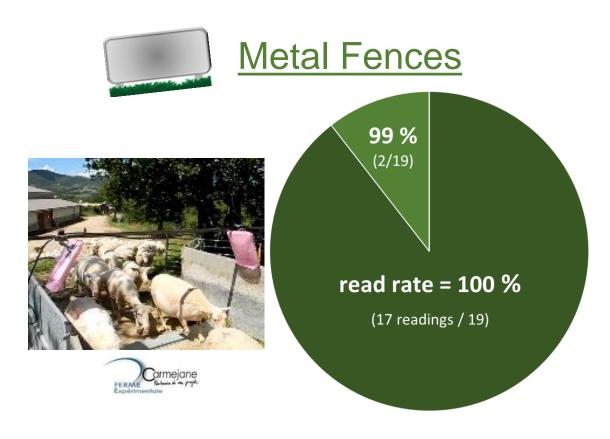

28 single pass readings (Batches of 50, 70 and 110 ewes)

19 single pass readings (Batches of 50, 90 and 130 ewes)



First conclusions

- Easy to set up
- High read rates
- Water effect ?
- Metal effect



Trials to be continued for the rest of the sheep industry

(traders, collection centers, slaughterhouses)





Step 2: Reading in a collection center



Trial conditions

• Width of corridor : 1,6 m

Nb Antennas : 2

• Height of antennas : 1,9 m

• Batch sizes : 52 Lambs

: 22 Ewes

• Speed : walk, run

• Fences : Full metal

21 single pass readings





Step 2: Reading in a collection center




- UHF waves reflect on metallic surfaces
- « Tunnel effect » of metal fences

Tunnel reader (logistics)



Photo: Fraunhofer IFF

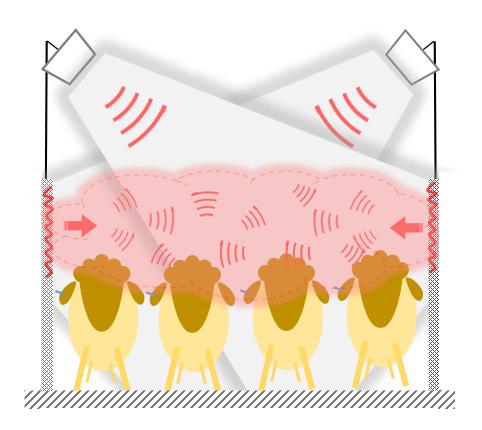

Conclusions & applications for future



- UHF, promising technology for multiple readings reliable, easy to set up, no needs to modify animals' circulation
- Keep on testing within different environments Slaughtering chain...
- Optimum "tags/antennas/power of the reader" can be improved
- ISO standards in progress
 Numbering schemes, data construct, quality and performances of tags
- UHF, a potential tool for precision livestock farming a possibility to monitor animal behavior with a cheap device

